

Urbandale Outdoor Wall (LED)**OL13700, OL13701, OL13702, OL13703-LED 1.0****FEISS®**

EST. 1955

Outdoor**GENERAL PRODUCT INFORMATION:**

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for wet locations.

For a complete list of dimmers, visit our website at www.Feiss.com

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

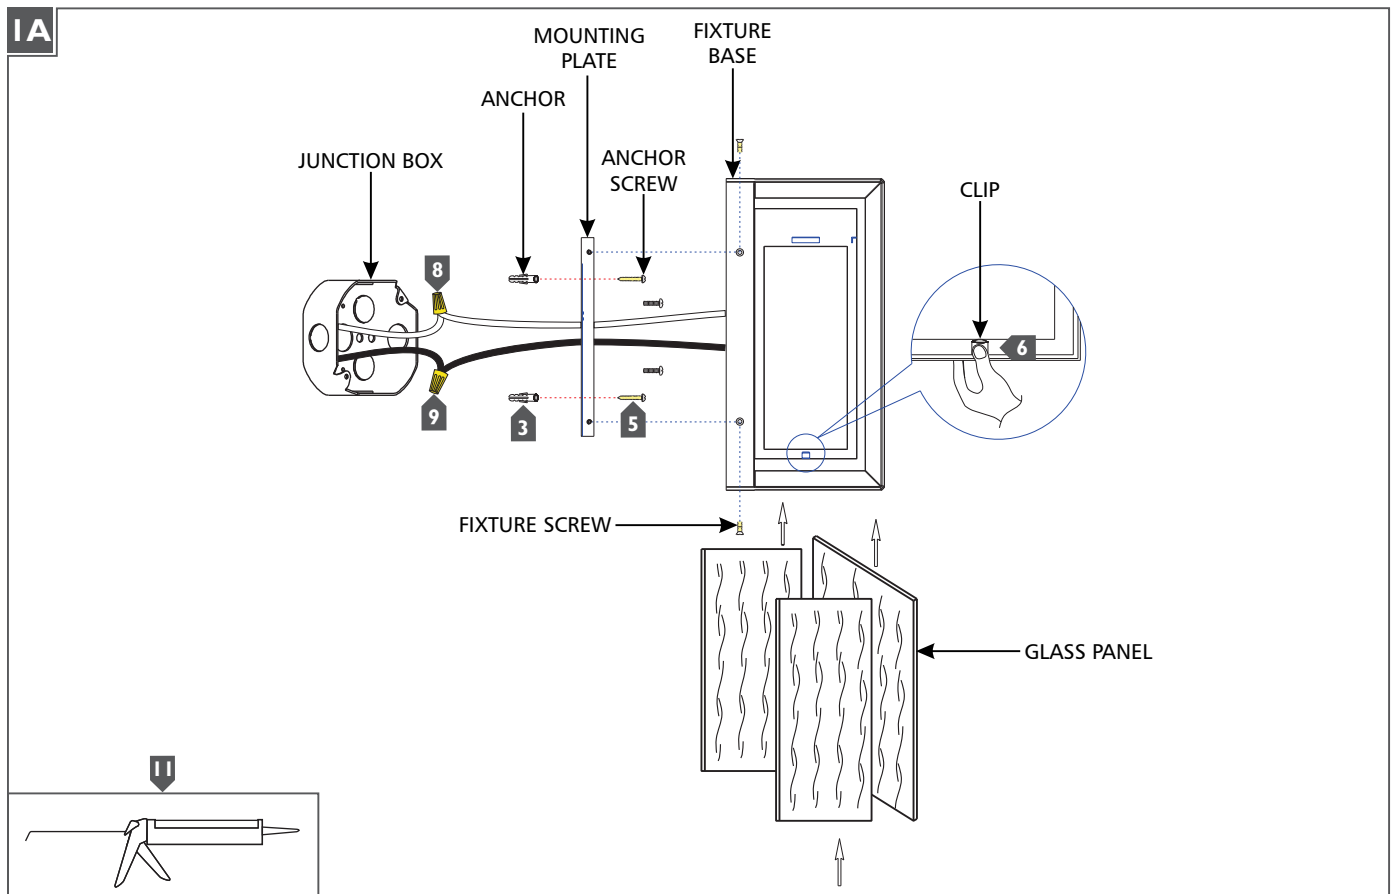


- 1** For Models OL13701, OL13702, and OL13703 Only: Temporarily install the mounting plate to the junction box.
- 2** For Models OL13701, OL13702, and OL13703 Only: Mark the anchor hole locations on the mounting plate and remove the mounting plate.
- 3** For Models OL13701, OL13702, and OL13703 Only: Drill appropriate size holes at the marked locations and install the anchors.
- 4** Secure the mounting plate to the junction box.
- 5** For Models OL13701, OL13702, and OL13703 Only: Screw the anchor screws into the anchors.
- 6** Insert the glass panels into the fixture and secure them in place using the clips.
- 7** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 8** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 9** Connect the black fixture wire to the hot power line wire with a wire nut.
- 10** Mount the fixture base onto the mounting plate and secure it with the fixture screws.
- 11** For wet locations, caulk around the base of the fixture with waterproof construction sealant.

PRECAUCIÓN: RIESGO DE INCENDIO

Este producto debe instalarse de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los riesgos que conllevan.

Utilizar conductores de suministro mínimo 90° c.

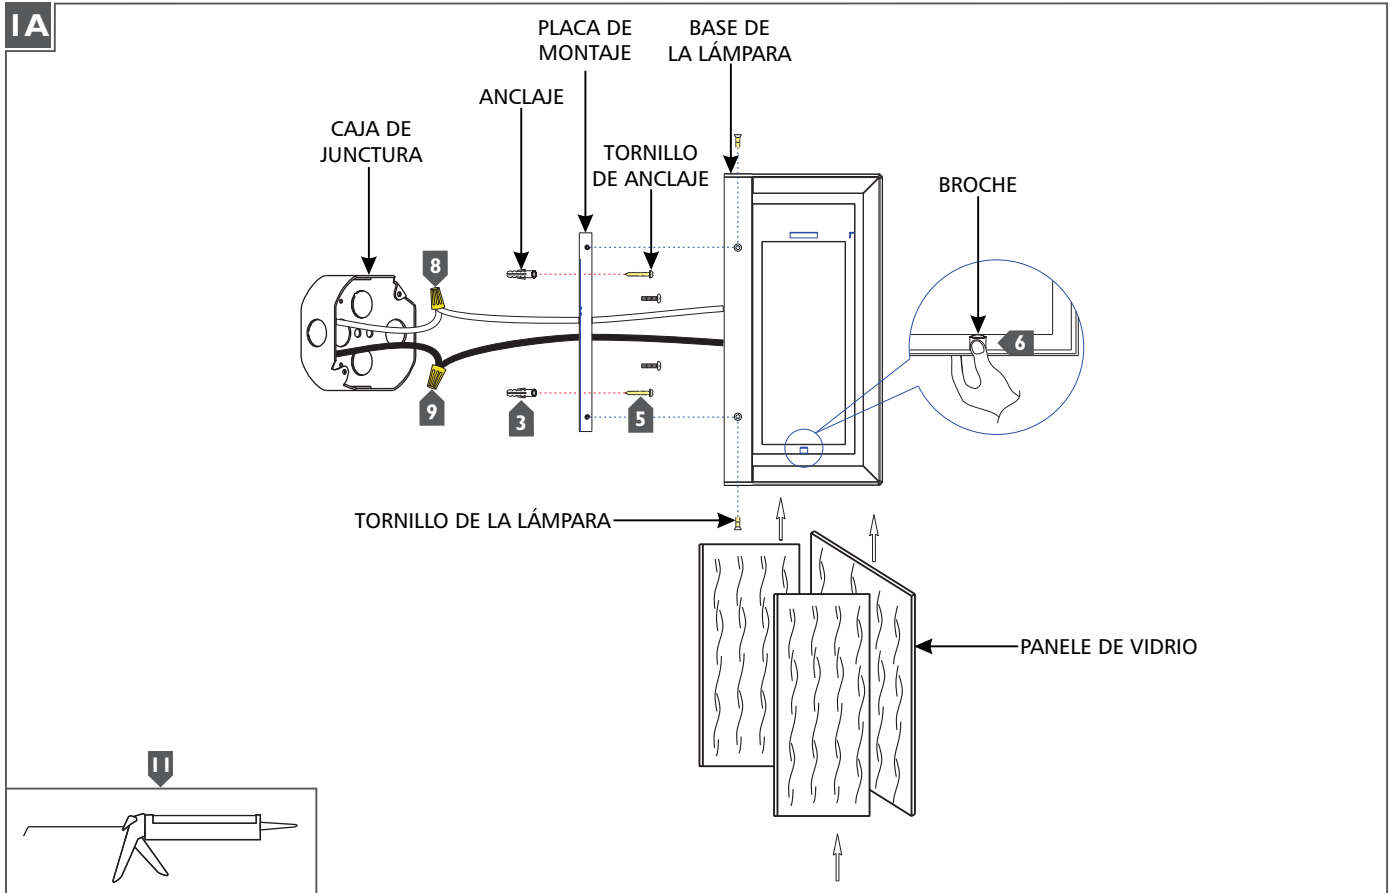

- 1** Para Modelos OL13701, OL13702, y OL13703 Solamente: Instalar temporalmente la placa de montaje a la caja de junctura.
- 2** Para Modelos OL13701, OL13702, y OL13703 Solamente: Marque la ubicación de los orificios de anclaje en la placa de montaje y retire la placa de montaje.
- 3** Para Modelos OL13701, OL13702, y OL13703 Solamente: Perforar agujeros del tamaño adecuado en los lugares marcados y instalar los anclajes.
- 4** Fije la placa de montaje a la caja de junctura.
- 5** Para Modelos OL13701, OL13702, y OL13703 Solamente: Atornille los tornillos de anclaje en los anclajes.
- 6** Inserte los paneles de vidrio en la lámpara y fijarlos en su lugar con los broches.
- 7** Conecte la lámpara a una tierra adecuada, de acuerdo con los códigos eléctricos locales.
- 8** Conecte el cable blanco de la lámpara al cable de línea de energía neutra con una tuerca para cable.
- 9** Conecte el cable negro de la lámpara al cable de línea eléctrica caliente con una tuerca para cable.
- 10** Monte la base de lámpara sobre la placa de montaje y fijarlo con los tornillos de lámpara.
- 11** Para lugares húmedos, calafatear alrededor de la base de la lámpara con sellador de construcción resistente al agua.

SAVE THESE INSTRUCTIONS!

FEISS[®]

EST. 1955
7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.Feiss.com

© 2017 Feiss. All rights reserved. The "Feiss" graphic is a registered trademark of Feiss. Feiss reserves the right to change specifications for product improvements without notification.
A Generation Brands Company